

AR-7HT

Hot Holding Rotisserie Companion



Hold rotisserie chickens and more at precise temperatures for hours with this companion holding cabinet. Featuring fanless Halo Heat®, the companion holding cabinet keeps your rotisserie oven cooking while keeping birds hot and fresh for hours.

Gentle, radiant Halo Heat holds food for hours without fans

Increase flexibility by stacking with another companion holding cabinet or with an Alto-Shaam rotisserie oven

Easy to operate with adjustable, electronic temperature controls

Visually appealing with attractive, front-of-house design

Made in the USA with a commitment to quality

ISO 9001:2015-certified

Standard Features

- One (1) adjustable thermostat, 60°–200°F (16°–93°C); one (1) holding temperature gauge
- Four (4) stainless steel wire shelves, two (2) stainless steel side racks, and sixteen (16) non-tilt pan support rails spaced at 2-15/16" (75mm) centers
- Electronic control
- Double-pane glass door

Capacity



24 Chicken boats: six (6) per shelf



8 Eight (8) full-size sheets 18" x 26" x 1" (457mm x 660mm x 25mm)*


16 Sixteen half-size sheets 18" x 13" x 1" (457mm x 330mm x 25mm)*

* With additional wire shelves

Food Capacity



AR-7HT 98 lb (44 kg)

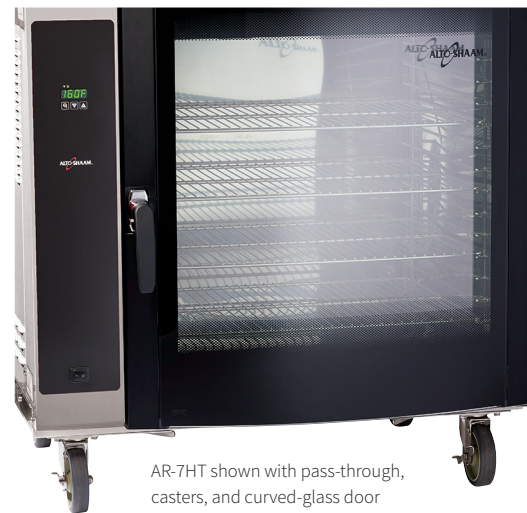

AR-7HT shown with pass-through, casters, and curved-glass door

Configurations (select one)

Electrical

- 120V 208-240V 230V

Control

- Electronic

Door Configuration

- Flat glass, single door, solid back (reach-in)
 Curved glass, single door, solid back (reach-in)(Standard)
 Flat glass, double doors (pass-through)
 Curved glass, double doors (pass-through)

Door Swing

- Right-hand (Standard)

Panel Color

- Stainless steel (Standard)
 Special color — allow additional 6-week lead time

Legs

- 4-6" (102-152mm) (5016115)
 4-6" (102-152mm) (5017128) with flanged feet. Allows holding cabinet to be bolted to floor.
 2" (51mm) (5001614) rubber. For 230V countertop units only; not available on models built for the US or Canada.
 5" (127mm) caster package (4007)

Accessories (select all that apply)

Stainless Steel Stand

- Stainless steel stand with storage shelf (FR-38177)
 Stainless steel stand with storage shelf, seismic model with brackets (5023312)

Shelf

- Chrome plated wire (SH-2851) Stainless steel wire (SH-24720)


Warranty

- Extended warranty begins at the end of standard warranty and continues for twelve (12) additional months. Consult the Alto-Shaam website for standard warranty terms.

AR-7HT Hot Holding Rotisserie Companion



Specifications

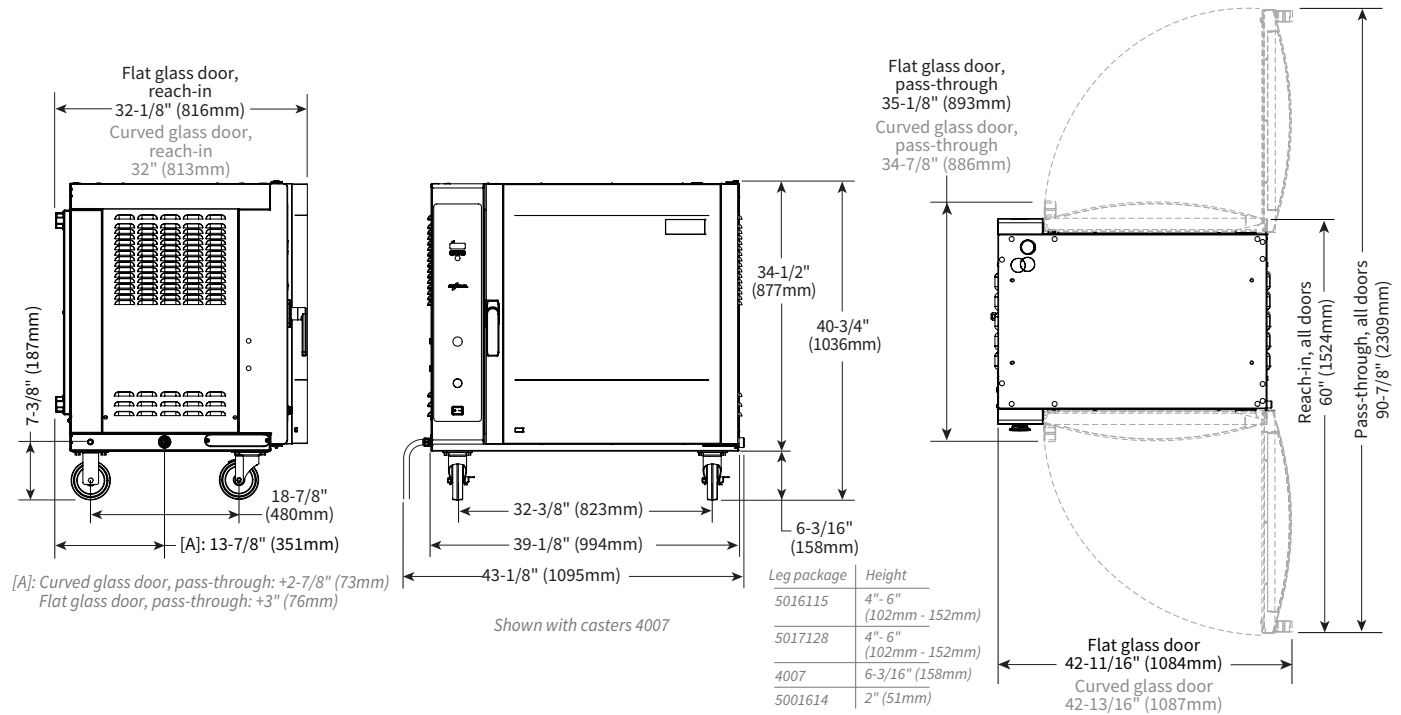

- The holding companion must be installed level.
- The holding companion must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- In order to maintain NSF standards, the unit must be sealed at bottom by NSF approved sealant, or equipped with legs/casters.




- Left: 6" (152mm)
- Right: 6" (152mm)
- Back: 6" (152mm)
- Top: 0" (0mm)
- Bottom: 0" (0mm)




| Model | Exterior (H x W x D) | Net Weight |
|---|---|----------------|
| AR-7HT, Flat glass, solid back (reach-in) | 40-3/4" x 43-1/8" x 32-1/8" (1036mm x 1095mm x 816mm) | 321 lb (146kg) |
| AR-7HT, Flat glass, pass-through | 40-3/4" x 43-1/8" x 35-1/8" (1036mm x 1095mm x 893mm) | 321 lb (146kg) |
| AR-7HT, Curved glass, solid back (reach-in) | 40-3/4" x 43-1/8" x 32" (1036mm x 1095mm x 813mm) | 321 lb (146kg) |
| AR-7HT, Curved glass, pass-through | 40-3/4" x 43-1/8" x 34-8/8" (1036mm x 1095mm x 886mm) | 321 lb (146kg) |

| | Ship Dimensions (L x W x H)* | Ship Weight* |
|--------|--|-----------------|
| AR-7HT | 56" x 45" x 51" (1422mm x 1143mm x 1295mm) | 400 lb (181 kg) |

*Domestic ground shipping information. Contact factory for export weight and dimensions.



| V | Ph | Hz | A | Breaker | kW | Plug Configuration | Cord Length |
|---------|----|-------|------|---------|-----|-----------------------------|---------------|
| 120 | 1 | 60 | 11.6 | 15 | 1.4 | NEMA 5-20P 20A, 125V | 72" (1829mm) |
| 208-240 | 1 | 60 | 6.0 | 15 | 1.4 | NEMA 6-15P 15A, 250V | 108" (2743mm) |
| 230 | 1 | 50/60 | 5.9 | 15 | 1.4 | CEE 7/7 250V CH2-16P 250V | 108" (2743mm) |



CONTACT US | W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com